

SPIDER-80X

HARDWARE SPECIFICATIONS (v6.01)

INTRODUCTION

The Spider-80X is a highly modular, truly distributed, scalable dynamic measurement system introduced by Crystal Instruments. It is ideal for a wide range of operations including vibration testing and machine condition monitoring for industries such as automotive, aviation, aerospace, electronics and military. The Spider-80X excels in industries that demand quick and accurate data recording in addition to real-time signal processing.

Multiple Spider front-ends can be combined to form a single high channel system. The Spider system can be arranged with various Spider front-ends and network switches to form different configurations. With multiple Spider-80X front-ends, a Spider system can have up to 64 input channels in a chassis and be chained up to hundreds of channels, with all channels sampled simultaneously. Even higher channel systems are possible. Multiple Spider front-ends are accurately synchronized through the IEEE 1588v2 protocol, ensuring all measurement channels are on the same time base. Accurate time synchronization results in excellent phase match in the frequency domain between all channels, either on the same Spider front-end or across different front-ends. Channel phase match, even between separate Spider front-ends, is within 1.0 degree at 20 kHz which is suitable for high quality structural and acoustics applications requiring cross channel measurement.

Spider-80X front-ends have voltage, IEPE, and optional charge types of input, which are ideal for shock, vibration, acoustic, or general purpose voltage measurements. Each Spider-80X front-end is equipped with 8 input channels and can accurately measure and record both dynamic and static signals. The mass flash memory can record 8 channels of streaming signals simultaneously at up to 102.4 kHz while computing real-time time and frequency based functions. Two output channels provide various signal output waveforms that are synchronized with the input sampling rate. Two tachometers sharing the connectors with outputs allow the system to measure the rotating pulse signals and conduct order tracking.

The Spider-80X front-ends can be controlled by a host PC or can operate in Black Box mode where a preprogrammed schedule is uploaded to the unit and started manually or based on event triggers. The ability to use any front-end in Black Box mode or in a distributed network system means that the user can place front-ends close to the measurement object, minimizing cable length and decreasing setup time.

The Spider-80X DSA front-end, Spider-80SG strain gage front-end, Spider-NAS storage device and Spider-HUB network switch all have the same physical form factor.

Performance

The Spider product line performance is the best in class with the highest dynamic range of any similar product. With patent-



ed technology, each measurement channel can detect signals as small as 6 μ V and as large as ± 20 V. Proprietary hardware technology delivers more than 150 dBFS dynamic range. The extremely high dynamic range eliminates the need for multiple front-end gain settings.


A high-speed floating point DSP manages the data input/output and real-time processing. The Spider-80X is also configured with RAM and onboard flash memory for mass data storage. Special thermal and low power design eliminates the need for a cooling fan.

Typical System Configurations


The Spider hardware platform supports two different software working modes: Black Box mode and PC Tethered mode. When the Spider front-end runs in Black Box mode, the preset projects can be executed based on a user-defined schedule. In PC Tethered mode, the PC is used as a control terminal to access the Spider through an Ethernet network. The Spider can be switched between the two modes. The PC Tethered mode is ideal for applications such as structural testing in a laboratory environment, while Black Box mode is ideal for remote monitoring.

The following figure illustrates some of the different configurations that are possible with the Spider system:

Configuration 1: PC Tethered Front-end

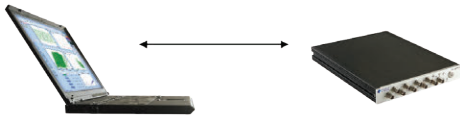

Configuration 2: PC Tethered With Front-ends

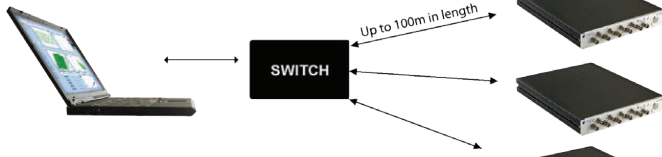

Configuration 3: Single Front-end



Configuration 1: PC Tethered with One Spider Front-End

One Spider front-end can be directly connected to a PC or to a LAN network through Ethernet. No switch is needed. The PC is used as a control and monitoring terminal via Crystal Instruments' EDM software.

Configuration 2: PC Tethered with Multiple Spider Front-Ends

Multiple Spider front-ends can be connected to make a high channel count system. Multiple switches, such as the Spider-HUB, can be used in cascade to extend the number of front-ends. The PC is used as a control and monitoring terminal via Crystal Instruments' EDM software.

Configuration 3: Black Box Mode with One Spider Front-End

This is the same as Configuration 1 except that the PC is not required during run time. A PC is required to install the Spider Black Box engine to the Spider front-end so it can run without a PC. The PC is only used to configure the Spider and download data files.

Input Channel Specifications

- Input Channels Installed per Front-end: 8
- Connector Type: BNC
- TEDS: IEEE 1451.4 compliant
- Coupling: AC, DC, IEPE (ICP®), and optional Charge (S80X-P44)
- IEPE DC offset Volt and Current: 4.2 mA at 21 V
- Input Type: Differential or Single-Ended
- Input Range: ± 20 Vpk
- Input Impedance: 1 M Ω for differential; 500 k Ω for single-end
- Input Protection Voltage: ± 40 Vpk
- AC Coupling: analog high-pass filter at 0.3 Hz @ (-3 dB) and 0.7 Hz @ (-0.1 dB)
- A/D Resolutions: 2 x 24-bit (patented dual A/D technology per input channel)
- Anti-Aliasing Filter: analog anti-aliasing filters plus digital decimation technique
- Digital Filter: high-pass filters (user programmable)
- Dynamic Range: 150 dBFS
- Sampling Rate: 0.48 Hz to 102.4 kHz, with 54 stages
- Maximum Bandwidth: 46.08 kHz
- THD: -95 dB (SV sine, DC to 1kHz)
- Amplitude Channel Match (1 kHz, 1V input): 0.02 dB
- Channel Phase Match: $< \pm 1.0$ degree up to 20 kHz
- Crosstalk: less than -100 dB
- Frequency Accuracy: 0.00025%
- Common Mode Range: ± 20 Vpk

- Amplitude Accuracy (1 kHz, 1V input): $\pm 0.1\%$

Tachometer Input Specifications

- Number of Tachometers: 2
- Connector type: BNC
- Configuration: Software configures the port as either output or tacho input
- Input Voltage Range of Rotating Pulses: zero to ± 10 Vpk
- Maximum RPM: 300,000

Tacho channel 1 can be used for both pulse counting and order tracking measurement. Tacho channel 2, with 50MHz ultra-high counter resolution, is only used for pulse counting.

Output Channel Specifications

- Channels: 1 or 2 channels
- Connector Type: BNC
- D/A Resolution: 24-bits
- Max Output Frequency: 46 kHz
- Dynamic Range: 100 dB
- Output Impedance: 50 Ω
- Maximum Output Current: 250 mA (HW 7.4 and earlier: 25mA)
- Amplitude Accuracy (1 kHz, 1Vrms) : $\pm 0.2\%$
- Anti-Imaging Filtering: 160 dB/oct digital plus analog filters
- Source Waveforms: sine, triangle, square, white noise, DC, chirp, swept sine, arbitrary waveform
- Arbitrary Waveform Size Limit: 16,000 points typical. Special configuration allows up to 128,000 points.
- Output Range: ± 10 Volts

Isolated Digital Input and Output

- Connector: 25-pin female D-SUB
- External Circuit Power Supply: 3.3 – 12 VDC ($\pm 10\%$)
- Internal Power: 12 VDC 400 mA
- Maximum Allowable Distance of Signal Extension: 50 meters

Inputs

- Input Format: opto-isolated input (compatible with current-sink output)
- Number of Channels: 4
- Input Resistance: 6.1 k Ω
- Input On Current: 2.0 mA or more
- Input Off Current: 0.16 mA or less
- Interrupt: 8 input signals are arranged into a single interrupt output signal. An interrupt is generated either at the rising edge (HIGH-to-LOW transition) or falling edge (LOW-to-HIGH transition).

Outputs

- Output Format: opto-isolated input (current sink output)
- Number of Channels: 4
- Output Rating: output voltage 12 VDC max, output current 100 mA per channel max
- Residual Voltage with Output On: 1.0 V or less (Output current < 100 mA)
- Pulse Width: 47 ms
- Rise Time: 250 μ s
- Fall Time: 50 μ s

High Speed Data Port interfacing to Spider-NAS

- Connector Type: 5-pin LEMO
- Maximum Distance of Cable: 2 meters
- Typical Aggregate Data Transfer Speed: Higher than 819.2 K Sample/second

System Specifications

- Total Memory: 4 GB flash memory used for system and data storage
- Total RAM: 32 MB
- Ethernet: 100Base-T, RJ45 female connector
- Serial Port: RS-485

LED Indicators

- RUN/STOP Status Indicator: run light green, stop lightless
- Flash Capacity Status Indicator: less than 60% green, between 60% and 90% yellow, between 90% and 100%, red.
- Power Indicator: power on/off
- LAN Indicator: communication active/inactive

Software Options

- The Spider-80X is compatible with all VCS or DSA software options from Crystal Instruments.

Network Protocols and IEEE 1588 Time Synchronization

Multiple Spider front-ends are synchronized through the IEEE 1588v2 protocol. The synchronization accuracy is better than ± 100 ns when a specified network switch is used. The data acquired by all the measurement channels will be on the same time base. Phase match between channels across different Spider front-ends is within 1.0 degree at 20 kHz.

- IPv4 Protocol Stack: ICMP, IP, UDP, TCP, IGMP
- IPv4 Based Applications: DHCP Client
- IEEE 1588v2 Protocol: PTP ordinary clock, both E2E and P2P synchronization supported, hardware level timestamp for PTP event messages
- Time Synchronization Accuracy Between Front-Ends: ± 100 ns or better (multiple Spider-80X front-ends connected by the Spider-HUB network switch)

Power Specifications (S80X-A11)

- Power Supply: 100 – 240 VAC (50/60 Hz), 15 VDC ($\pm 10\%$)
- Power Consumption: less than 15 Watts
- S80X-A11NA: power supply with LEMO adapter (North America)
- S80X-A11EU: power supply with LEMO adapter (Europe)
- S80X-A11UK: power supply with LEMO adapter (UK)

Environmental and General Specifications

- Enclosure: rugged sealed metal box, electrical safety compliant, and internal EMI shielding
- Dimensions: 240 x 35 x 310 mm (w x h x l)
- Weight: 2 kg
- Safety Standard: electromagnetic compatibility and sensitivity: EN 61326:1997+A1:1998+A2:2001, EN61000-3-2: 2000, EN61000-3-3: 1995+A1:2001
- Operational Temperature: -10 °C to +55 °C
- Storage Temperature: -20 °C to +70 °C
- Shock: 50 g's, 315 in/sec, tested at 6 sides, non-operational test
- Vibration: 5 – 500 Hz, 0.3 grms, tested at 3 sides, operational test
- Vibration: 5 – 500 Hz, 2.42 grms, tested at 3 sides, non-operational test

5 Slot and 8 Slot Enclosures (S80X-A35)

Description

Enclosure supports 5 or 8 Spider-80X front-ends (40 to 64 channels) and includes AC power supply, Ethernet switch, and cooling fans. The Spider-HUB network switch is included and is

installed at the factory. Spider-NAS may be included when the proper option is purchased.



Specification

- Enclosure: metal box
- Available Slots: 5 or 8, depending on selection
- Power Supply: AC adaptor accepts 100 to 240 VAC (50/60 Hz)
- Fan Operation: turns on or off by a switch
- Dimension: 5-slot: 343 x 310 x 407 mm (w x h x l) (measured off the silver front cover, which is wider than the body)
- Dimension: 8-slot: 470 x 310 x 407 mm (w x h x l) (measured off the silver front cover, which is wider than the body)
- Weight : 8-slot with all front-ends installed : 80lb
5-slot with all front-ends installed : 55lb
- Power consumption:
8-slot with all front-ends installed: 100W
5-slot with all front-ends installed: 70W

Configurations

- S80X-A35-5: 5-slot enclosure including power supply for up to 5 Spider-80X front-ends and a built-in Spider-HUB network switch. Shipping case is included.
- S80X-A35-5N: 5-slot enclosure including power supply for up to 5 Spider-80X front-ends and a built-in Spider-HUB network switch. Includes a built-in Spider-NAS storage device. Shipping case is included.
- S80X-A35-8: 8-slot enclosure including power supply for up to 5 Spider-80X front-ends and a built-in Spider-HUB network switch. Shipping case is included.
- S80X-A35-8N: 5-slot enclosure including power supply for up to 5 Spider-80X front-ends and a built-in Spider-HUB network switch. Includes a built-in Spider-NAS storage device. Shipping case is included.

Spider-80X Battery (Spider-BATTERY)



Specifications

- Enclosure: rugged sealed metal box, electrical safety compliant, and internal EMI shielding
- Size: 240 x 35 x 310 mm (w x h x l)
- Weight: 2.72 kg
- Battery: 194Wh (13.5Ah/14.4V)

(continued on next page)

Spider-80X Accessories

Travel Cases



- S80X-A45: ruggedized travel case (single system)
- S80X-A45-5: ruggedized travel case (5-slot system)
- S80X-A45-8: ruggedized travel case (8-slot system)

© 2016 Crystal Instruments Corporation. All Rights Reserved. 07/2016

Notice: This document is for informational purposes only and does not set forth any warranty, expressed or implied, concerning any equipment, equipment feature, or service offered or to be offered by Crystal Instruments. Crystal Instruments reserves the right to make changes to this document at any time, without notice, and assumes no responsibility for its use. This informational document describes features that may not be currently available. Contact a Crystal Instruments sales representative for information on features and product availability.